






# Green Passion

CASTELGARDEN













In the Castelgarden "Green Passion 2010" all the novelties are easily identifiable







# LAWN TRACTORS



#### LAWN TRACTORS - XH RANGE

The five tractors with mid-mounted cutting 22 to 24 Intek, to the professional Honda deck are perfect for consumers with large, open garden areas and demanding, professional requirements.

The high-specification XH tractors have a powerful appearance and are equipped with high efficient and modern Briggs & Stratton two cylinder (V-twin) engines, ranging from

GXV 660.

Castelgarden XH range features a big 360 litre grass bag with optional electric dump for easier emptying; 102 or 122 cm cutting deck with twin collecting-blades for great cutting performances.

XH RANGE

Powered by

**XH RANGE** 

Powered by

XHT 220 XHX 240 XHT 220 4WD XHX 240 4WD E Intek 22 V-twin Intek 24 V-twin Intek 22 V-twin Intek 24 V-twin

XHX 255 4WD GXV 660 Twin cyl. POWERED by HONDA.

1000 m<sup>2</sup> 8000 m<sup>2</sup>

effective grass bag is perfect for collecting leaves as well as grass. Easily emptied from the driver's

The 360 litre large and





XHX 255 4WD model powered by th new Honda GXV 660 engine.



- A Extra large rear tyres ensure great mobility and a smooth ride; rear 20" front 16".
- B Ergonomic and comfortable steering wheel.
- C The steel chassis longer, stronger and larger than that used for any other model provides superior balance and stability.
- D Useful cup and phone holder and 12 V power supply.
- E Foot operated hydrostatic transmission and strong iron black foot panel.
- F Anti-scalp wheels reduce the risk of damaging delicate ground.
- G The strong bumper protects the front of the tractor effectively.

# LAWN TRACTORS - XH RANGE



#### THE 4 WHEEL DRIVE SYSTEM

The unique 4 wheel drive system makes Castelgarden XH tractors even more enjoyable and useful. It features a rear pump and a hydraulic drive system on the front axle, for highly efficient hydraulic 4WD transmission. The system ensures traction on uneven, wet and slippery areas and slight slopes. 4WD automatically adjusts the traction on all wheels depending on conditions and terrain.

#### The benefits of a 4 WD system:

- increased effectiveness using rear mounted accessories;
- the hydraulic system provides excellent traction via differentials, reducing the risk of tearing
- increased control and manoeuvrability on









Easy to operate twin speed foot pedals for precise control and effortless speed and direction changes. Strong iron foot panels.





The 10 litre capacity fuel tank

with level indicator on the dash

board. 2.5 litre capacity oil tank










- hours of operation
- battery voltage
- RPM
- status of the grass collector
- oil level
- fuel level and reserve gauge
- 24/hour time display



Handy 12 V powers mobile phone, CD player or sprayer. Standard tool tray and cup holder keep tools and beverages within reach.



On the 2 wheel drive models the front axle is made of strong, shock resistant nodular cast iron that does not bend or deform, as can be the case for steel-fabricated axles.

with Castelgarden's new "Easy memo" control. It allows selection of a cutting height from 25 to 100 mm with memorisation of the chosen height.

Cutting height is selected

# LAWN TRACTORS - XX AND XT RANGE



Deck height from 30 - 90 mm that is easily adjustable from the driver's seat by the 7-positon lever





The electronic dashboard is equipped with 6 LED showing:
- Parking brake engaged
"-story unbooke

- Grass-collector unhooked
- Blades engaged Seat without operator
- Neutral gear
- Low battery charge



122 cm cutting deck with contra-rotating twin collecting blades.

#### **XX RANGE**

1000 m<sup>2</sup> 8000 m<sup>2</sup>

XX RANGE		Powered by
XX 255 HD	GXV 660 Twin cyl.	POWERED by HONDA
XX 220 HD XX 220 HDE	Intek 22 V-twin Intek 22 V-twin	BRIGGS & STRATTON

#### **XT RANGE**

XT RANGE	
XT 160 C HD	WM 16
XT 170 HD XT 190 HD XT 200 HD	P.B. 16,5 AVS Intek 18,5 Intek 22 V-Twin
XT 175 HD	GCV 530 Twin cyl.
4000 3	0000 3

DA.

1000 m<sup>2</sup> 8000 m<sup>2</sup>



- A Adjustable ergonomic seat.
- B 15" front wheels.
- C Strong metal foot panel. Non-slip foot pads help protect the operator's feet from vibration.
- D Easy access for maintenance.
- E Big grasscollector, 320 lt volume.

XI RANGE		Powered b
XT 160 C HD	WM 16	CASTELGARDE
XT 170 HD XT 190 HD XT 200 HD	P.B. 16,5 AVS Intek 18,5 Intek 22 V-Twin	BRIGGS & STRATTON
XT 175 HD	GCV 530 Twin cyl.	POWERED by HOND
		-

**BEST COLLECTING** 

technical developments of our engineers principle".

The Castelgarden XH, XX and XT in the Castelgardem R&D Department. lawn-tractors are extraordinary in terms of A newly developed straighter tunnel and cutting and collecting. Collecting capacity a larger tunnel mouth have improved the has been greatly enhanced due to the effectiveness of the "inverse vacuum cleaner



Larger tunnel mouth: the tunnel can be removed without the need for tools







be manually emptied with ease from the





The dashboard with multifunction display is standard on the XT model equipped with twin cylinder engine. It provides information about:

- Hours of operation
- Battery voltage RPM indicator
- 24 hour clock
- Status of the grass collector
- Oil level - Fuel level and reserve



102 cm cutting deck with contra-rotating twin collecting blades.



# LAWN TRACTORS - XD RANGE

is appealing to look at, compact, extremely handy with its small turning circle and exceptionally comfortable. Cutting performances are excellent due to the 98 or the brand new 108 cm wide cutting deck a capacious 6 litre fuel tank. Available with gear transmission



Cutting height adjustment in 7 positions from 25 to






Gear selector: 5 forward and 1 reverse. Central compartment for small objects.



The twin blades guarantee correct grass flow and can be used with the mulching plug for mulching operations.



1000 m<sup>2</sup> 8000 m<sup>2</sup>




- A Adjustable ergonomic seat.
- B 15" front wheels.
- C Strong metal foot panel
- D Easy access for maintenance.



The central compartment is particularly useful for storing small items.







XD range is now also available with hydrostatic speed control. Safe driving: the tractor stops when the pedal is released



Wide side ejector mouth for better cutting performance even in demanding conditions.









Useful holder for bottle and mobile phone.

# LAWN TRACTORS - XG RANGE

but include high standard features such as the diagnostic display, the rear petrol tank with fuel



XG RANGE		Powered by
XG 150 C	WM 14,5	CASTELGARDEN
XG 140 XG 140 HD XG 170 HD	P.B. 13,5 AVS P.B. 13,5 AVS P.B. 16,5 AVS	BRIGGS & STRATTON
XG 175 HD	GCV 530 Twin cyl.	HONDA

1000 m<sup>2</sup> 8000 m<sup>2</sup>







Contra-rotating 92 cm wide twin blades for a better flow of both air and grass.

- A Adjustable ergonomic seat.
- B 260-litre capacity grass collector. C New compartment under the seat.
- D 15" front wheel.
- E New 6 LED dashboard.
- F Front bumper for improved safety.



Forward and reverse hydrostatic speed control. Safe driving: the tractor stops when the pedal is released.



New fuel tank placed under the bonnet, 6 lt volume.



Grass-collector easy to discharge from the operator's seat.





New dashboard with 6 useful diagnostic LED:

- Parking brake engaged
- Grass collector unhooked
- Blades engaged
- Seat without operator
- Neutral gear
- Low battery



New reinforce front axle.



A wide and straight tunnel for better collecting; trailer hitch kit as standard.

16. CASTELGARDEN

# LAWN TRACTORS - XF AND XE RANGE



#### XF RANGE


The compact XF collecting riders have a single blade which increases the effectiveness of the collecting system. They feature a manual gear or hydrostatic speed control. The adjustable seast ensures ergonomic positioning and the grass-collector is easily empties from the driver's seat via the handle bar.

XF 130 C Castelgarden WM  XF 130 B&S P.B. 13.5 AV	
XF 130	12,
XF 140 HD B&S P.B. 13,5 AV	
XF 135 HD Honda GXV 390	

HONDA

Powered by

1000 m<sup>2</sup> 8000 m<sup>2</sup>



Hydrostatic speed control.

Engine rpm control.

reverse. Engine rpm control.

Single blade cutting deck.






- A Adjustable ergonomic seat.
- B Grass-collector capacity: 170 lt.
- C Adjustment of cutting height 7 positions.
- D 72 cm cutting deck; mulching kit available as optional on all models.



#### **XE RANGE**

These are the smallest Castelgarden riders, but are powerfull nevertheless. The engine – with electric start – is placed just between the foot panels with easy access for standard maintenance. They feature a single cutting blade and a 63 cm cutting deck which can be set for 5 different cutting heights ranging from 30 to 75 mm. The innovative continuously variable transmission let you choose the right speed without pushing the clutch.





no clutch required to change speed easier to drive between trees and bushes reduced fluid maintenance





easily be emptied from the driver's seat.

Compact single blade cutting deck.



- A 140 lt. capacity grass collector; easy discharged from the driver's seat.
- B Cutting height 5 positions.
- C 63 cm cutting deck; mulching kit available as optional on all models.
- D Easy access to the engine for maintenance.
- E Easy manual blade engagement.



# FRONT MOWERS



#### REAP THE BENEFITS OF A FRONT MOWER.



### Front mounted cutting deck for improved accessibility.

Because the cutting deck is at the front, nothing is missed. You have full mowing control and can mow along fences, close to trees and under bushes, as well as cut right into corners and over edges. The front mounted cutter decks give a superb finish as the grass is cut before it is run over by the wheels. Great manoeuvrability is assured thanks to the rear wheel steering.

Spring, summer, autumn, or winter, with the wide range of accessories the Castelgarden front mowers become year-round companions.

Castelgarden front mowers are truly for all year-round use. You can cut grass in summer, collect leaves in autumn, clean snow from your garden path in winter and brush away dust and gravel from paved areas in spring. From sweepers and trailers to snow blades – think about accessories you may want to add, either now or in the future.





#### Mulching technology for a healthy lawn.

A beautiful lawn normally takes three steps: cut and remove the cuttings, water and then add nutrition. With the Castelgarden front mowers you cut and fertilise in one step. With mulching technology the grass is cut and re-cut into tiny bits that are then blown right down into the

turf again. The recycled clippings provide moisture and natural nutrients for your lawn. Cutting is easier and faster because you skip the collection stage. You save time, reduce fuel consumption and minimise environmental impact. That's mulching.







# FRONT MOWERS - X1

Imagine real driving pleasure! Castelgarden X1 represents a new generation of compact front mowers for design—conscious home owners. The rear wheel steering and easy-to-use single hand controls reduce time and effort spent in the garden. The idea was to create a vehicle which mows and manoeuvres like the bigger front mowers. Material and construction, comfort and convenience, road grip and performance – the thinking is the same as that behind a modern car. Castelgarden X1 is built on a self-supporting frame in composite material that is cast in a single piece which strengthens the construction. The key word being integrated design.





#### X 1

Engine: Castelgarden 12.5 Cutting width: 78 cm cutting deck Gearbox: 3 forward gears; 1 reverse New adjustable ergonomic seat Mulching technology



Storage compartment: like a modern vehicle the X1 has an integrated





The cup holder is located under the steering wheel for perfect accessibility.


Driving and steering with the same pair of rear wheels brings excellent manoeuvrability and formidable traction.





Manual cutting height

adjustment - 9 cutting heights.





New factory design – the mounted cutting deck forms an integrated part of the machine.





Horizontally adjustable comfort seat with high back rest for maximum comfort.



# FRONT MOWERS - XM RANGE

The XM Castelgarden front mower range is powered by reliable petrol engines with maximum torque for tough mowing conditions. The engines provide excellent fuel economy, low emission levels, quick starting and quiet operation. The machines are fitted with 3.8 litre fuel tanks to provide sufficient capacity for long mowing sessions. The reinforced protective frame on the deck protects the mower from obstacles that may get in the operator's way. The mulching system turns piles of rotting grass into a thing of the past. Once you try them you will not want to be without them!



Easy access to the manual blade engagement located under the seat on the right





Using the lever on the deck you can easily select the right cutting height from 25-85 mm.

#### **XM** 160 HD

Engine: Briggs & Stratton 15.5 Hydrostatic drive Infinitely variably controlled speed Cutting width: 85 - 105 cm Adjustable ergonomic seat Mulching technology and rear discharge Adjustable steering wheel with spinner

#### **XM** 140 HD


Engine: Briggs & Stratton 13.5 Hydrostatic drive Infinitely variably controlled speed Cutting width: 85 - 95 cm Adjustable ergonomic seat Mulching technology and rear discharge Adjustable steering wheel with spinner



After use, the deck can easily be raised to a 30° washing position for cleaning without removing the belt.



The hydrostatic transmission allows you to control the speed effortlessly, both in forward and in reverse.



Castelgarden front mowers are compact mowers which require little storage space.





A neat and smooth deck for the Castelgarden front mower. The large deck volume, the aerodynamically designed shape and the two synchronised blades with replaceable blade tips offer a perfect mulching finish.



The steering wheel has an easy-to-grip steering ball for one-handed operation.



All front mowers have bumpers for completely safe operation.

## LAWN TRACTORS & FRONT MOWERS

#### **ACCESSORIES**



#### Mulching kits for lawn-tractors



All Castelgarden tractors easily turn into mulching machines to mulch the grass into small pieces that then fertilises

## Stone guard



By using the stone guard to cut long grass without fitting the grass-collector in safe conditions, the grass falls to the ground.



#### Trailer hitch kit



Fit a trailer hitch to use rear mounted attachments such as a combi - cart or spreader. Easily fitted onto the tractor rear using the bolts supplied in the kit.



## Combi cart





Get to grips with heavy garden tasks with the help of the combi - cart. Rust resistant poly bed and 180 litre capacity, it can be used as a wheelbarrow or hitched on a tractor. Weight with no load: 25 kg. Size: length 159/173, width 83 cm, height



#### Plastic roller



Tow and push roller, with a very light plastic body (14 kg when not filled). It can be filled with water up to a weight of 114 kg. 45 cm cylinder diameter. Working width: 60 cm.



Lawn Tractors Front Mowers



#### Fertilizer





Fertilizer spreader, with a 40 litre capacity poly bed and an adjustable measuring device from the operator's seat. Spreading width: 240 cm.



#### Protective cover





Essential to protect your lawn tractor or front mower when not in use. This cover is quick and easy to fit; in just a few seconds your machine is protected from dust and moisture. Designed to fit all tractors, it measures 250 cm long by 125 cm wide and has a side window for ventilation. Easy to fold



### Snow blade



A robust metal blade, easy to mount on the front of an XX or XT tractor to clean paths and snow from driveways. Working width: 120 cm. It can fit a metal scraper or a rubber scraper bar.







Ideal for clearing sand, dirt and leaves from asphalt, lawns and concrete areas, this sweeper will also clear newly fallen snow. It features adjustable ground pressure with two rear pivot wheels. The angle is easily adjusted manually. Working width: 110 cm. An optional dust cover is also available.



#### Snow thrower



This accessory transforms tractors into efficient snow removers. Front mounted, with single stage operating, it has a rectangular chute and adjustable skid shoes. The snow thrower can be raised and lowered comfortably from the driver's seat. The chute angle is operated using a control near the steering wheel. Working width: 100 cm.



#### PTO KIT



The PTO kit enables the lawn tractor to be used to power front mounted accessories like the sweeper or the snow thrower. It is a patented Castelgarden product that transfers the power from the engine to the front accessory. Only fits to XX or XT tractors with electromagnetic clutches.



#### Rear weight



Easy to fit on the grass-catcher support on the XX and XT models. It improves the stability of the machine when using front accessories, particularly the snow-thrower and sweeper. Weight: 23 Kg.



#### Front weight



Frame weight



Just a few bolts are all it takes to mount the front weight and the frame weight kit onto your lawn tractor or front mower and improve stability when using rear mounted accessories. Front weight: 11,5 Kg. Frame weight: 13,5 Kg.











## LAWN TRACTORS & FRONT MOWERS

#### **ACCESSORIES**

### Snow chains



Easy to fit on the tractor rear wheels, these classic ladder cross chains in "Dshape" galvanizedmanganese steel provide traction on snow covered paths.



### Pro-snow chains





These snow chains offer increased traction and are recommended when operating on icy ground. Highly efficient with transverse links that are fitted with spikes for maximum traction. Snow chains for 18" tyres.







#### TH



SYSTEM		XT 160 C HD •			• •
		XE 80 VD •	•		•
		XF 130 •	• •		•
		XF 140 HD •	• •		•
	RAC Quick Connection	XG 140 •			• •
	RAC stands for "Release And Connect". The system enables	XG 140 HD •			• •
	you to change accessories in one easy movement, without	XG 170 HD •			• •
	the need for any tools! Just click on and off. The unique	XD 140 •		•	• •
	RAC quick connection is available for all XM models.	XD 170 HD •		•	• •
		XDL 170 •		•	• •
and the same of th	all and a second	XDL 190 HD •		•	• •
		XT 170 HD •			• •
		XT 190 HD •			• •
	مسر ا	XT 200 HD •			• •
2.	3. 4.	XX 220 HD •			• •
		XX 220 HDE •			• •
THE TWO-IN-ONE CUTTING DECK.		XHT 220 •			•
		XHX 240 •			•
		XHT 220 4WD •			•
The range of high performing cutting decks let you grass is long. Perfect cutting is achieved by adjusting		XHT 220 4WD E •			•
	the cutting height in small gradations. The three decks	XE 75 VD •	•		•
nulching system recycles grass clippings, with the grass erving as fertiliser for your lawn. The rear discharge node deposits the grass behind the machine, when the		XF 135 HD •	• •		•
	ge the grass to a perfect finished result.	XG 135 HD •			• •
	he	XG 175 HD •			• •
		XDL 175 HD •		•	• •
		XT 175 HD •			• •
		XX 255 HD •			• •
	No.	XHX 255 4WD •			•
		X1			
		XM 130			
	PI	XM 140 HD			
		XM 160 HD			
		7			

XF 130 C XG 150 C XD 150 C XD 150 C HD







# LAWN MOWERS





Powerful Castelgarden engine integrated into the bonnet.



Double skin grass box designed to improve airflow and reduce noise and dust emissions



The oversized air-filter keeps the engine clean and quiet.



Big rear wheels for more stability, excellent cutting performance and a





The new Castelgarden Silent system reduces noise levels by around 3 db (A) compared to a conventional



soft grips, ensuring maximum comfort and ergonomics for



Integrated exhaust resulting in reduced noise and emissions in keeping with Euro 2 standards.



Insulated bonnet and optimised

POWERED by
HONDA Powerful Honda OHC engines for the Castelgarden range! The autochoke system ensures easy starting, with the usual excellent standards of reliability, performance and low noise emissions. The improvements such as the stainless steel chassis, the PRO handles and the dryflex wheels, and standard features such as the fully adjustable ergo handles and the mulching plugs, combine to make these walk behinds unique in the lawn-care market. Regardless of the choice of chassis material (aluminium, ABS or galvanised steel), and the cutting system (collecting or mulching), Castelgarden lawn mowers powered by Honda are the ideal solution for demanding gardeners. 32. CASTELGARDEN



NEW Honda engines with autochoke system. Easy starting in all conditions.





Big wheels for perfect cutting results even in the most demanding garden conditions. Wheel dimensions: front 210 mm – back 300 mm.

#### Stainless steel dec

Stainless steel is an iron-carbon alloy with a minimum of 10.5% chromium content. The name comes from the fact that stainless steel does not stain, corrode or rust as easily as ordinary steel. Stainless steel has higher resistance to oxidation and corrosion in natural and man-made environments. It is a hard wearing material that brings extra durability to the machine.

POWERED by
HONDA

# **XAPW** 55 MHS 3 Big wheel mower Engine: GCV 190 autochoke Deck material: aluminium Cutting width: 51 cm; mulching kit included Grass-box capacity: plastic / canvas 70 litres Wheel regulation: centralized Cutting height positions: 7-from 30 to 100 mm Driving lever: yes 3 speed 300 m<sup>2</sup> 3000 m<sup>2</sup>





improved with a useful can and tools or mobile holder.







durability combined for excellent cutting results.

#### XSW 55 MHS Big wheel mower Engine: GCV 190 autochoke Deck material: steel galvanized

Cutting width: 51 cm; mulching kit included Grass-box capacity: plastic / canvas 70 litres Wheel regulation: centralized Cutting height positions: 6-from 30 to 90 mm Driving lever: yes 300 m<sup>2</sup> 3000 m<sup>2</sup>





POWERED by
HONDA

Mulching kit included: you can either collect the grass cuttings into the bag, or finely shred and blow them down into the





Grass cuttings are blasted into a large collection bag - you don't have to stop and empty it so often.







Galvanised treatment that protects steel decks from





Mulching System. The grass cut is finely chopped before being blown back into the lawn.



Powerful, versatile and always reliable, Castelgarden lawn mowers powered by Briggs & Stratton engines handle big and medium size lawns with ease. The Ready Start system in the engines is a useful feature which makes moving more comfortable than ever. Different engine powers combine with different sizes and deck types. The mowers can also accommodate textile grasscatchers and mulching plugs. They are userfriendly with ergonomic controls and light weight for full manoeuvrability.





XA 55 MBS XAP 55 MBSE

Engine: 750 series DOV / 675 series XRZ with electric start

Deck material: aluminium

Cutting width: 51 cm; mulching kit included Grass-box capacity: plastic / canvas 70 litres Wheel regulation: centralized

Cutting height positions: 7-from 30 to 80 mm Driving lever: yes / yes

300 m² 3000 m²







### XAPW 55 MBS 3

Engine: 750 series DOV Deck material: aluminium Cutting width: 51 cm; mulching kit included Grass-box capacity: plastic / canvas 70 litres Wheel regulation: centralized Cutting height positions: 7-from 30 to 100 mm Driving lever: yes

300 m² 3000 m²





XSIW 55 MBS 4 INOX

Big wheel mower

Engine: 750 series DOV Deck material: stainless steel Cutting width: 51 cm; mulching kit included Grass-box capacity: plastic / canvas 70 litres Wheel regulation: centralized Cutting height positions: 6-from 30 to 90 mm Driving lever: yes 4 speed

300 m<sup>2</sup> 3000 m<sup>2</sup>







Self-propelled machine for maximum control with minimum effort.

Resistance to corrosion and staining, low maintenance and natural shine make stainless steel the ideal base material for walk behind lawn mowers. It does not oxidize or turn black and because of its specific gravity it is also lighter than other chassis materials.





**XS** 50 B

Engine: 500 series XLQ Deck material: steel galvanized

300 m<sup>2</sup> 3000 m<sup>2</sup>



# XS 50 MBS Engine: 625 series XRZ Deck material: steel galvanized Cutting width: 46 cm; mulching kit included Grass-box capacity: plastic / canvas 70 litres Wheel regulation: centralized Cutting height positions: 5-from 30 to 75 mm Driving lever: yes 300 m<sup>2</sup> 3000 m<sup>2</sup>



POWERED by CASTELGARDEN







Powerful Castelgarden engines developed for high performance and maximum





Centralized height adjusting.
One lever to lift all wheels
and to choose the optimum
cutting height.

Stainless steel is 100% recyclable. That's not all; an average stainless steel object is composed of about 60% recycled material. It's also more environmentally friendly as it's not painted.

POWERED BY CASTELGARDEN



#### XSW 50 MGS Big wheel mower

Engine: Castelgarden MC 55 Deck material: steel galvanized
Cutting width: 46 cm; mulching kit included Grass-box capacity: plastic 60 litres Wheel regulation: centralized Cutting height positions: 6-from 30 to 90 mm







Deck material: steel galvanized Cutting width: 48 cm; mulching Grass-box capacity: no bag Wheel regulation: 4 handles Cutting height positions: 5-from 21 to 65 mm

300 m<sup>2</sup> 3000 m<sup>2</sup>



XS 50 MGS

Engine: Castelgarden MC 45 Deck material: steel galvanized

Cutting width: 46 cm; mulching kit included

# LAWN MOWERS - ELECTRIC





Centralized wheel adjustment on the deck, for accurate and fast setting of the grass height from 21 to 60 mm.



Ergonomic handle with dual hand safety switch and foldable telescopic bars for easy height adjustment.



Powerful 1600 Watt electric motor for an excellent cutting result.



The mower needs no assembly. Just fix the easy links and set the right height for comfortable mowing.






Easy links on the bars for fast storage.

# LAWN MOWERS - ELECTRIC



The textile grass box has a capacity of 40 litres





models have larger rear and front wheels than standard electric mowers, bringing greater stability.



XPL 41 EL



XSW 50 ELS

Motor: 1800 Watt - 230-240 V Deck material: steel galvanized Grass-box capacity: plastic 70 litres Wheel regulation: centralized Cutting height positions: 6-from 30 to 90 mm

300 m<sup>2</sup> 3000 m<sup>2</sup>







No need to deny yourself a small garden.







# LAWN MOWERS - SPECIAL EDITION



### CASTELGARDEN BRIGGS & STRATTON HONDA

Castelgarden presents the Special Edition range with models to cater for the specialised demands of small to big garden owners. The assortment includes petrol driven models - with Castelgarden, Briggs & Stratton or Honda engines - as well as electrical machines. Important feature is the 4-in-1 cutting system, as well as the adjustable and foldable handlebar, on steel deck models. The cutting width ranges from 33 cm to 51 cm for the largest models.



#### XSEW 55 BSQ

Engine: B&S 650 series XLS Deck material: steel Cutting width: 51 cm, 4-in-1 cutting system Grass-box capacity: plastic 60 liters
Wheel regulation: 2 levers

Cutting height positions: 6-from 25 to 90 mm Driving lever: yes



#### XSEW 55 BS **XSE** 55 B

Engine: B&S 625 series XLS Deck material: steel Cutting width: 51 cm Grass-box capacity: plastic 60 liters Wheel regulation: 2 levers Cutting height positions: 6-from 25 to 90 / 6-from 25 to 75 mm Driving lever: yes / no

300 m<sup>2</sup> 3000 m<sup>2</sup>



# XSEW 55 GS

Engine: Castelgarden OM 55 Deck material: steel Cutting width: 51 cm Grass-box capacity: plastic 60 liters Wheel regulation: 2 levers Cutting height positions: 6-from 25 to 90 mm

Driving lever: yes

300 m<sup>2</sup> 3000 m<sup>2</sup>



### XSEW 50 HS

Engine: Honda GCV 135 Deck material: steel Cutting width: 46 cm Grass-box capacity: plastic 60 liters Wheel regulation: 2 levers Cutting height positions: 6-from 25 to 90 mm Driving lever: yes

300 m<sup>2</sup> 3000 m<sup>2</sup>









# LAWN MOWERS - SPECIAL EDITION













#### A CLEAN LOOK FOR THE NEW FOUR IN ONE

models! The new steel deck XSPW series meets the needs grass catcher. And this is not all. The four in one system also in the stainless-steel version.

Important changes for the Castelgarden professional makes changing from cutting to side discharge or from collecting to mulching easy with a simple flick of the of demanding users and re-establishes Castelgarden's switch. Even cutting heights have been re-defined to leadership position in garden care technology. Italian adapt to every lawn type. A wide choice of technical design and strength are the two distinguishing features. features sets new standards: 4-speed variator combined Special attention has been paid by the Castelgarden with Anti-Vibration system, BBC (Blade Brake Clutch), engineers to construction and function. Innovative centralized cutting adjustment and the integrated washing cutting results and maximize collection in the oversized is available with Briggs & Stratton or Honda engines and





# LAWN MOWERS - PROFESSIONAL

With the Professional range, Castelgarden breaks new ground. The BBC (Blade Brake Clutch) allows the engine to be turned on while blade is stopped and the user can engage and disengage the blade directly from the handle as needed. A clever feature for comfortable and faster mowing. The Pro 60 models are especially designed for heavy duty mowing. Engineered with long lasting components, ergonomics and features for maximum performance, Pro 60 models are available with B&S or Honda engines, with integrated AVS on the handle, and professional transmission for excellent cutting results in all grass conditions.



Powerful engines for heavy duty use





New BBC device allows easy disengagement of the blade whilst the engine is on.

#### Big wheel mower Engine: Honda GCV 190 autochoke Deck material: aluminium Cutting width: 51 cm - kit mulching Grass-box capacity: plastic canvas 70 litres Wheel regulation: centralized Cutting height positions: 7 - from 30 to 100 mm Driving lever: yes 300 m<sup>2</sup> 3000 m<sup>2</sup>

XAW 55 MHS BBC











Heavy duty handle fixed on "Silent-block" to





Profi wheels on ball-bearings

# BRUSHCUTTERS





Tap & Go nylon head Profi.

New double



4 tooth blade.








\* Weight includes nylon head.





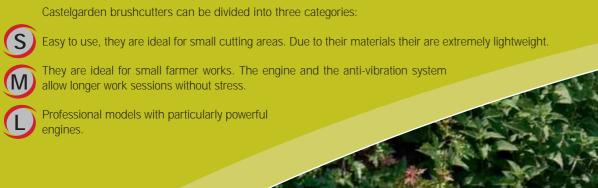

New double comfort harness.





Tap & Go nylon head Profi.











Standard cutter: Tap&Go - 4T blade Weight: 8.30 kg\*

Standard cutter: Tap&Go - 4T blade

Weight: 9.00 kg\*



**XB** 35 S

Displacement: 32.6 cc Power: 1.1 kW - 1.5 HP Shaft: 26 mm Handle: loop Carburettor: diaphragm with 2 port rotary and primer bulb Standard cutter: Tap&Go - 4T blade Weight: 7.20 kg\*

Weight: 7.90 kg\*





Tap & Go nylon head Profi.


4 tooth blade.







The products have perfect balance and an excellent power-weight ratio. A rigid drive shaft and the ergonomic handlebar with incorporated controls and comfortable grip ensure top performance. "Easy Starter" provides easy start-ups









3 tooth blade

Tap & Go nylon head.









Displacement: 25.6 cc Power: 0.9 kW - 1.2 HP Handle: loop Carburettor: diaphragm with 2 port rotary and primer bulb Standard cutter: Tap&Go - 3T blade Weight: 5.60 kg\*



Displacement: 25.6 cc Power: 0.9 kW - 1.2 HP Shaft: 26 mm curved Handle: loop Carburettor: diaphragm with 2 port rotary and primer bulb Standard cutter: Tap&Go Weight: 5.30 kg\*

#### THE BACK PACK MODELS

narrow ditches vineyards or orchards. The weight is fastener for great safety, it only weights 0,9 kg. carried on the user's back for maximum comfort. The The flexible connection between engine and shaft back pack - completely new in design and material allows use without tiring even when working uphill. - allows ergonomic distribution of weight and thanks to The "Easy Starter" system ensures smooth and simple the cushioning reduction of vibration during operating.

Ideal for mowing steep banks, overgrown slopes, Flame-proof and equipped with quick uncoupling

Displacement: 42.7 cc Power: 1.4 kW - 1.9 HP

Shaft: 28 mm flexible Handle: loop

Weight: 11.90 kg\*

Carburettor: diaphragm with


2 port rotary and primer bulb

Standard cutter: Tap&Go - 4T blade



Tap & Go nylon head Profi.





\* Weight includes nylon head.



Some models feature mini 4 stroke 25 and 35cc engines. They are reliable, unequalled in smoothness, efficient and quiet, making them more environmentally friendly yet offering you superb performance. A convenient looped or bike handle, in some cases with a barrier bar, ensure control with safety. A metal blade is supplied as standard for more demanding jobs.



Double harness.





Tap & Go nylon head.



**XB** 435 HD



Displacement: 35 cc Power: 1.2 kW - 1.6 HP Shaft: 26 mm Handle: bike Carburettor: rotary valve Standard cutter: Tap&Go - 4T blade Weight: 10.61 kg\*









**XB** 435 H



Displacement: 35 cc Power: **1.2 kW - 1.6 HP** Shaft: 26 mm Handle: loop Carburettor: rotary valve Standard cutter: Tap&Go - 4T blade Weight: 9.75 kg\*



HONDA



Displacement: 25 cc Power: 0.8 kW - 1.1 HP Shaft: 26 mm Handle: bike Carburettor: diaphragm Standard cutter: Tap&Go - 3T blade Weight: 8.06 kg\*







Tap & Go nylon head.







Displacement: 25 cc Power: 0.8 kW - 1.1 HP Shaft: 26 mm Handle: loop Carburettor: diaphragm Standard cutter: Tap&Go - 3T blade Weight: 7.20 kg\*










XR 425 HJ

Displacement: 25 cc Power: **0.8 kW - 1.1 HP** Shaft: 26 mm jointable Handle: loop Carburettor: diaphragm Standard cutter: Tap&Go Weight: 5.80 kg\*

Castelgarden brushcutters are the solution when the motor mower is out of its depth. Depending







4 tooth blade.

Tap & Go nylon head Profi.







Double harness.



Tap & Go nylon head.



#### **ACCESSORIES**

For pruning at great heights. Developed for Castelgarden brushcutters, the accessories make it easier and safer to prune fruit trees and thin out shrubs and bushes. Branches can be cut keeping

your feet on the ground and using the pruner or the hedge cutter. As they have low power absorption we recommend use with models with engines from 28 to 35 cc.



#### **HEDGE CUTTER**

HTA Ø 24 mm HTA Ø 26 mm Bar length: 42 cm



In line with the latest product developments, the structure and the materials used improve the handiness and lightness that make them ideal for use around the house. Easy and very comfortable to use they are ideal especially for private users.



3 tooth blade.











Double Harness.

**XB** 34 D Displacement: 32.6 c Power: 0.9 Kw – 1.2 HP Shaft: 26 mm Std cutter: Tap&Go - 3 T Blade Handle: bike

Weight: 7.5 Kg















**XR** 26 J XR 26













4T blade for the model XB 10 JEL.

# TRIMMERS - ELECTRIC

Put the finishing touches on your lawn using one of Castelgarden's electric trimmers. Ideal for trimming light grass around the garden and for improving the look of your property quickly and with ease. Castelgarden trimmers are lightweight and quiet, start with the push of a button, produce no exhaust emissions and require little maintenance. Perfect for those with smaller gardens or light weeds!



Strap is included for the XB 10 JEL and XR 11 EL





The comfortable handle brings better manoeuvrability and is easily adjusted via the screw.





the head can be slightly adapted in order to reach difficult nooks.

# HEDGE CUTTERS



# HEDGE CUTTERS - PETROL

Castelgarden petrol hedge trimmers have been The handle rotates through 90° from left to developed to combine ergonomic design with right, ensuring the best cutting position at all high quality and excellent cutting performance. times.



Displacement: 25.4 cc Power: **0.8 Kw – 1.1 HP** Blade: Single Blade lenght: 75 cm Teeth dist.: 28 mm Mech. Brake: yes Anti-vibr.: no Adj. Handle: no Weight: 5.40 Kg





The engine and starter have been designed so the machine starts quickly





Anti-vibration system precisely calculated spring elements dampen down engine vibrations to a minimum, reducing



## **XHM** 60

Displacement: 25.4 cc Power: **0.8 Kw – 1.1 HP** Blade: Laser double Blade lenght: 60 cm Teeth dist.: 28 mm Mech. Brake: yes Anti-vibr.: yes Adj. Handle: yes (180°) Weight: 5.70 Kg





rear handle is adjustable

#### XHJ 550

Displacement: 24.5 cc Power: 0.9 Kw – 1.2 HP Blade: Laser double Blade lenght: 61 cm Teeth dist.: 28 mm Mech. Brake: yes Anti-vibr.: yes Adj. Handle: yes (180°) Weight: 5.40 Kg







## HEDGE CUTTERS - ELECTRIC

Castelgarden electric hedge cutters are powerful enough for most trimming jobs, even when branches are old and tough. They are comfortable to use, lightweight, quiet and environmentally friendly. They guarantee perfect cutting of hedges and shrubs, making them ideal for small to medium sized gardens. They are equipped with doublesided blades for rapid cutting both upwards and downwards. The quick-stop blade brake and the large hand guard guarantee increased safety and the adjustable handle allows ergonomic operation in any position.



## **XH** 470 E

Power: 450 Watt - 0.45 kW Blade length: 450 mm Teeth distance: 16 mm Weight: 3.35 kg







Soft touch handle bar.





Power: 600 Watt - 0.60 kW Blade length: 600 mm Teeth distance: 27 mm Weight: 3.80 kg









Shrub shear blade.



Metal gear.



Power set.





Easily removable tooling system.



Grass shear blade.

# **CHAINSAWS**






## STRATO CLEAN TECHNOLOGY


A selection of the Castelgarden petrol made up of air plus fuel and exhaust gases. chainsaws features the new Strato Clean Technology. In a two stroke conventional engine, part of the fresh fuel mix is expelled with the exhaust gases during the combustion phase; this component of unburned fuel mix is the main cause of high emissions. The Strato Clean Technology is a layer of pure air interposed between the flow of fuel mix


Because of this layer of pure air, emissions are 70% lower than those for a conventional 2 stroke engine. In addition, this layer of air ensures the complete combustion of the fuel mix without any loss of fresh fuel mix (air + fuel). This brings considerable fuel savings of up to 30% compared to a conventional

#### Advantages:











- A Excellent anti-vibration system.
- **B** Bar with sprocket nose.
- C Side chain tensioner (only for XC 42 P / XC 44 P models).
- D Adjustable oil pump.
- E Fast idle carburettor. Air lever automatic return.
- F Automatic chain break system.
- G Easy access to air filter and spark plug w/o tool.
- H Handle isolated from engine.
- I Primer (only for XC 44 P model).

\*Weight without bar and chain.



Antivibration: yes
Bar length 40 P: 13" - 33 cm
Bar length 42 P: 16" - 40 cm

Chain type 40 P: 325".050" (95VP - 56E)

Chain type 42 P: 325".050" (95VP - 66E) Chain type 44 P: 325".050" (95VP - 72E)

Oil pump: automatic / adjustable

Weight: 4.36 kg\*





## CHAINSAWS - PETROL

The Castelgarden petrol chainsaw range includes pruning models as well as semi – professional chainsaws. They are all easy to handle, high quality and high performing. They have an "Easy Starter" system which guarantees starting in all weather conditions. Strato Clean Technology features on some models, with these machines one step ahead of European emission legislation. Castelgarden chainsaws are available in three categories:



Compact chainsaws for small pruning or wood chopping work. These are the perfect bridge between hobby and agricultural requirements.



Farmer chainsaws, ideal for agricultural use but also for use in extreme environments.



Semi-professional chainsaws for tree cutting as well as for demanding



Displacement: 62.0 cc Power: 3.0 kW - 4.1 HP

Bar length: 18" - 45 cm / 20" - 50 cm Chain type: 3/8".058" (73LP - 66 / 72 E) Oil pump: automatic adjustable

Weight: 5.67 kg\*







Decompression valve.







XC 52 P

A - Two-mass

Displacement: 50.9 cc Power: 2.3 kW - 3.1 HP Bar length: 18" - 45 cm / 20" - 50 cm Chain type: 325".058" (21BP - 72 / 78 E)

Oil pump: automatic Weight: **5.52 kg\*** 







Displacement: 48.7 cc Power: 2.1 kW - 2.9 HP Bar length: 18" - 45 cm

Chain type: **325**".**050**" **(95VP - 72E)** Oil pump: automatic adjustable

Weight: 5.30 kg\*





Replaceable cartridge filter does not require tools.





Air lever with automatic return: a convenient starting device.



Displacement: 48.7 cc Power: **2.1 kW - 2.9 HP** 

Bar length: 16" - 40 cm / 18" - 45 cm Chain type: 325".050" (95 VP - 66 / 72 E)

Oil pump: automatic Weight: 5.30 kg\*



## CHAINSAWS - PETROL

XC 38 P is the smallest chainsaw and it is designed for leisure and part-time use. Our main focus, as always, is on the user and the work environment. For this machine our requirements in terms of safety, function, ergonomics and reliability are as high as those for professional tools. Simply the best power to weight ratio, high torque and throttle response, featuring low emission, low noise and fuel economy.



A - Bar with sprocket nose.

B - Automatic and inertial chain brake.

- C Primer.
- D Fast idle carburettor.
- **E** Limited vibration with the handle isolated from the engine with steel springs.

Low emissions and low noise.





Primer and easily removable air filter without tools.

## XC 38 P

Displacement: 38.3 cc Power: 1.7 Kw - 2.3 HP Bar: 13" - 33 cm / 16" - 40 cm

Chain: .325" .050" (95VP-56/64E) Oil pump: automatic

Tensioner: front Fuel tank: 390 cm<sup>3</sup> Oil tank: 240 cm<sup>3</sup> Weight: 4.70 Kg





Displacement: 38.3 cc Power: 1.7 Kw – 2.3 HP Bar: 16" - 40 cm Chain: 3/8 0.50" 91VG-56E Oil pump: automatic Primer: yes Tensioner: tool free Fuel tank: 390 cm<sup>3</sup> Oil tank: 240 cm<sup>3</sup> Weight: 4.70 Kg







Displacement: 38.3 cc Power: 1.7 Kw – 2.3 HP Bar: 16" - 40 cm Chain: 3/8 0.50" 91VG-56E Oil pump: automatic Primer: yes Tensioner: front Fuel tank: 390 cm<sup>3</sup> Oil tank: 240 cm<sup>3</sup> Weight: 4.70 Kg

XC 380







## XC 380 Q

Displacement: 38.3 cc Power: **1.7 Kw – 2.3 HP** Bar: 14" - 35 cm Chain: 3/8 0.50" 91VG-50E Oil pump: automatic Primer: yes Tensioner: tool free Fuel tank: 390 cm3 Oil tank: 240 cm<sup>3</sup> Weight: 4.70 Kg









Displacement: 38.3 cc Power: 1.7 Kw - 2.3 HP Bar: 14" - 35 cm Chain: 3/8 0.50" 91VG-50E Oil pump: automatic Primer: yes Tensioner: front Fuel tank: 390 cm<sup>3</sup> Oil tank: 240 cm<sup>3</sup> Weight: 4.70 Kg











## CHAINSAWS - PETROL

The concept of Castelgarden chainsaws was born to guarantee some peculiar features including handiness, reliability, easy starting and lightness that make their use friendly and pleasant, and assure high quality and excellent performance. The engine marked by low emissions of exhaust fumes is one of the reasons why the Castelgarden chainsaws are Euro 2 approved.



### XC 400 Q

Displacement: 40.0 cc Power: 1.6 kW - 2.2 HP Bar length: 16" - 40 cm Chain type: 3/8".050" (91PJ - 56E) Oil pump: automatic

Tensioner: tool free Weight: 4.40 kg\*



#### XC 400

Displacement: 40.0 cc Power: **1.6 kW - 2.2 HP** Bar length: 16" - 40 cm / 18" - 45 cm

Chain type: 3/8".050" (91PJ - 56 / 60E) Oil pump: automatic

Tensioner: front Weight: 4.40 kg\*



### XC 350 Q

Displacement: 35.0 cc Power: 1.4 kW - 1.9 HP Bar length: 14" - 35 cm Chain type: 3/8".050" (91PJ - 52E) Oil pump: automatic Tensioner: tool free

Weight: 4.35 kg\*



#### XC 350

Displacement: 35,0 cc Power: **1.4 kW - 1.9 HP** Bar length: 14" - 35 cm / 16" - 40 cm

Chain type: 3/8".050" (91PJ - 52 / 56E) Oil pump: automatic

Tensioner: front Weight: 4.35 kg\*





## CHAINSAWS - PRUNING

The Castelgarden pruning models have chain allows precise and sharp cutting, been designed for professional use. perfect for grafting and plant maintenance. Compact, well-balanced and light, they Personal protective equipment such as guarantee perfect and fast cutting even helmets, gloves, visors, safety footwear for lengthy and intensive work. The XC and protective overalls must always be 27PC model is designed for tree pruning worn when using any of these machines. by professionals. The carving bar with 1/4"

#### XC 28 P

Displacement: 25.4 cc Power: **1.0 kW - 1.3 HP** Antivibration: yes Bar length 28 P: 12" - 30 cm sprocket nose Chain type 28 P: 3/8".050" (91VG - 45E) Oil pump: automatic adjustable Weight: 2.98 kg\*



Balanced ergonomic handle



## XC 27 P

Displacement: 25.4 cc Power: 1.0 kW - 1.3 HP Antivibration: yes
Bar length 27 P: 10" - 25 cm sprocket nose Chain type 27 P: 3/8".050" (91VG - 40E) Oil pump: automatic adjustable Weight: 2.98 kg\*



#### **XC 27 PC**

Displacement: 25.4 cc Power: 1.0 kW - 1.3 HP Antivibration: yes Bar length: 10" - 25 cm carving Chain type: 1/4".050" (25AP - 60E) Oil pump: automatic adjustable Weight: 2.98 kg\*



\*Weight without bar and chain.

## CHAINSAWS - ELECTRIC

Castelgarden electric chainsaws are ideal for people who occasionally use saws for light work around the house. They can take care of the trimming of bushes and small branches, as well as of the cutting down saplings. They are fun, light, easy to use and quieter than petrol saws. The convenience begins even before you start cutting, you just plug it in and off and you go. They do not require any specific maintenance. To store simply place the guard on the bar and wind the cord up. From 1700 to 2000 Watt, with manual or quick version tensioner.



XC 19 PE XC 22 PE XC 22 QE

OREGON DOUBL

Power 19 PE: 1800 Watt Power 22 PE / 22 QE: **2000 Watt** Bar length 19 PE: **14" - 35 cm**Bar length 22 QE / 22 PE: **16" - 40 cm** Chain type 19 PE: 3/8" mini .050" (91VG - 50E) Chain type 22 QE / 22 PE: 3/8" mini .050" (91VG - 56E) Chain tensioning 19 PE / 22 PE: manual Chain tensioning 22 QE: quick chain tightening Oil pump: automatic Weight: 3.90 kg\*

The screw allows the manual tensioning of the chain (model XC 19 PE and XC 22 PE).



#### **EX** 200 **EX** 200 Q

Power: 2000 Watt Bar length: 16" - 40 cm Chain type: 3/8" .050" (91VG - 56E) Chain tensioning 200: manual Chain tensioning 200 Q: quick chain tightening Oil pump: automatic Oil tank capacity: 200 ml Weight: 3.95 kg\*








## **EX** 180 **EX** 180 Q

Power: 1800 Watt Bar length: 14" - 35 cm Chain type: 3/8" .050" (91VG - 50E) Chain tensioning 180: manual Chain tensioning 180 Q: quick chain tightening Oil pump: automatic Oil tank capacity: 200 ml Weight: 3.95 kg\*





Power: 1700 Watt Bar length: 14" - 35 cm Chain type: 3/8" .050" (91PJ - 50E) Chain tensioning 170: manual Chain tensioning 170 Q: quick chain tightening Oil pump: automatic Oil tank capacity: 190 ml Weight: 4.05 kg\*

\*Weight without bar and chain.





# **BLOWERS**



#### **XBL** 620 B

Displacement: 62.0 cc Power: 2.9 kW - 3.9 HP Average air vol.: 15.7 m³/min. Max air speed: 87 m/sec Carburettor: diaphragm rotary valve Weight: 8.50 kg



Weight: 5.0 Kg







#### **XBL 250 H**

Displacement: 22.5 cc Power: 0.9 kW - 1.2 HP Average air vol.: 10 m³/min. Max air speed: 67 m/sec Carburettor: diaphragm Weight: 4.04 kg



**CHIPPER & SHREDDER** 



Large bag to collect





small wood cutting.



### **BIO POWER**

Knife chipper: knives are double reversible Powerful motor: 2100 Watt - 2.1 kW Capacity for branches: up to 40 mm (inlet opening) Cutting system: rotating disc with 2 blades Weight: 19.0 kg Self-feeding function Zero current switch Collector included





The blade system is based on a rotating disc that has two blades mounted on the top. The blades cut branches into small chips.

#### **BIO QUIET**

Cuts and crushes the waste Powerful motor: 2100 Watt - 2.1 kW Capacity for branches: up to 45 mm (inlet opening) Cutting system: silent cutter Weight: 23.0 kg Reverse function Self-feeding function Zero current switch Collector included





Matter is cut and crushed with a slowly rotating roller with sharp teeth. The mechanism pulls the branches down, and chips them into rough compost.



The blades cut and crush the wood into pieces.



# **SCARIFIER**





# **CULTIVATORS**



Specific for cultivating. Powerful engine, a 60 cm rotavator and 2 working gears. Tellus 103 B controls are simple and ergonomic, easy to use for the hobby users as well.



### TELLUS 103 B

Gross weight: 78 Kg

Engine type: **B&S INTEK 0HV 6.5**Transmission: **Gears and chain in oil bath and belt** Handlebar: **Height adjustable**Drive wheels: 13x5.00-6 Speeds: 2 + 1 reverse

### **TELLUS 103 B ATTACHMENTS**

Ridging plough



32 cm rotavator with iron wheels Ø350 x 50



Tellus 95 B and Tellus 95 H are multifunctional units, with 4 strokes engine and geared reverse drive. They can be converted from motor cultivator to twin-bladed mower or 50 cm multifunctional mower by simply changing the implement and turning the handlebar.

Multifunctional unit, with 4 strokes engine, geared reverse drive. It can be converted from motor cultivator to twin-bladed mower or 50 cm multifunctional mower by simply changing the implement and turning the handlebar.

#### **TELLUS 95 B TELLUS 95 H**

Engine type: B&S 675 series / HONDA GCV 160 Transmission: Worm in oil bath and gears + belts drive

Handlebar: Adjustable & Reversible Drive wheels: 13x5.00-6

Speeds: 1 + 1 reverse Gross weight: 55 Kg



#### **TELLUS 95 ATTACHMENTS**

Grassland mower 53 cm



Double blade 87 cm cutting bar Snow blade 85 cm







Rear mount rotavator 50 cm



Ridging plough



Front adjustable brush 82 cm with collector

TELLUS 75/82 models are ready to handle the toughest jobs and larger areas. These rugged cultivators have plenty of horsepower and a well-balanced, easy-to-control design. Fitted with Honda, B&S and Castelgarden engines garden at the end of the season, the TELLUS they create less vibration and bring faster soil

tilling. Two tilling speeds, reverse and forward for transport, get the work done quickly. So if you're breaking up turf, preparing particularly difficult soil or turning over a large vegetable are ready and willing, and more than capable.



Working width: 82 cm Rotors: 6

Engine: Honda GX 160 Speed: 2+1 speed

Gear: mechanical box Handle adjustable in height/side

Transport wheels in front Crop protector discs standard

The TELLUS 82 model with horizontal shaft engine is equipped with belt and chain transmission in oil bath and a gear box for dual speed.

**TELLUS 75 RG TELLUS 75 RB TELLUS 75 RH TELLUS 75 RHX** 

Working width: 75 cm Rotors: 6 Engine: Castelgarden engine TM 60 / B&S 800 series / Honda GC 160 / Honda GX 160 Speed: 1+1 speed Handle adjustable in height Transport wheel in front Crop protector discs standard

The TELLUS 75 models with horizontal shaft engines are equipped with belt and chain transmission in oil bath.



## **CULTIVATORS**

TELLUS 40 and TELLUS 50 are forward-rotating cultivators ideal for many types of garden work - including preparing seedbeds in spring and maintenance throughout the season. They run more smoothly, more cleanly and more quietly than comparable tillers They feature a 40 to 50 cm tilling width, heavy duty handles and fingertip controls. Their size makes them perfect for working in raised beds and narrow rows so that your soil stays in top condition all year round. TELLUS is built to last so that you can enjoy more quality time in your garden for years to come. The TELLUS 500 and TELLUS 360 G rotary cultivators are the perfect fit for smaller gardens, and offer you Castelgarden quality at a lower price.









#### **TELLUS 50 G** TELLUS 50 H **TELLUS 50 RB**

Working width: 50 cm Rotors: 4 Engine: Castelgarden engine OM 55 / Honda GCV 135 / B&S 625-series Speed: Single speed / 1+1 speed Handle adjustable in height/side Transport wheels at rear Crop protector discs standard

engine are equipped with belt and worm gear transmission in oil bath, a proven reliable design.





Working width: **40 cm** Rotors: **4** Engine: Castelgarden engine SV40 / OM 55 Speed: Single speed / 1+1 speed Handle adjustable in height Transport wheels at rear



## TELLUS 500 G TELLUS 500 RG

Working width: 50 cm Rotors: 4 Engine: Castelgarden engine M50 / OM55 Speed: Single speed / 1+1 speed Worm gear and belt drive Handle adjustable in height/side Transport wheel in front Crop protector discs as standard

#### TELLUS 360 G

Working width: **36 cm** Rotors: **4** Engine: Castelgarden engine V 35 Speed: Single speed Worm gear and belt drive Handle adjustable in height Transport wheel in front



## **CULTIVATORS & SCYTHE**

### **CULTIVATORS ACCESSORIES**

#### De-thatcher.







Adjustable ridging plough.



Transport wheels kit.



Ridging plough.



Rotovator 16 cm.



Kit adjustable spur.

ACCESSORIES	TELLUS 360	TELLUS 500	TELLUS 40	TELLUS 50	TELLUS 75	TELLUS 82
DE-THATCHER	•	•	•	•	•	
RIDGING PLOUGH	•	•	•	•	•	•
ROTOVATOR 16 CM	•		•			
SCARIFIER	•		•			
TRANSPORT WHEELS SET						•
KIT ADJUSTABLE SPUR		•			•	
TRANSPORT WHEELS		•		•	•	

#### PETROL SCYTHE

performance and exemplary reliability are the inherent qualities in the new Castelgarden Tellus B has a single mulch bar with height adjustment 87 B scythe mower. This self-propelled sickle bar skids and cutter bar clutch. 87 cm cutting width mower will cut long grass, tall weeds and light and clutched v-belt drive system. The wheels have scrub in paddocks, orchards and meadows. It is solid track grip tyres for inclines and rough terrain. designed to operate in conditions where you can't Weight 54 kg.

Tried and tested technology, outstanding cutting use an ordinary mower. Equipped with a powerful Briggs & Stratton 625 series engine, the Tellus 87



LAWN	
TRACTORS	7















MODEL	ENGINE	TRANSMISSION	CUTTING SYSTEM	CUTTING POSITIONS	BLADE ENGAGEMENT	GRASSBAG CAPACITY	ALARM FULL GRASSCATCHER
XF 130 C	Castelgarden WM 12,5	gear	72 cm single blade	5 pos. from 30 to 75 mm	manual	170 lt	n/a
XG 150 C	Castelgarden WM 14,5	gear	92 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	260 lt	yes
XD 150 C	Castelgarden WM 14,5	gear	98 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	n/a	n/a
XD 150 C HD	Castelgarden WM 14,5	hydro	98 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	n/a	n/a
XT 160 C HD	Castelgarden WM 16	hydro	102 cm twin blades	7 pos. from 30 to 90 mm	electromagnetic clutch	320 lt	yes
XE 80 VD	B&S 875 Series	variator	63 cm single blade	5 pos. from 30 to 975 mm	manual with O.P.P.	140 lt	n/a
XF 130	B&S P.B. 13,5 AVS	gear	72 cm single blade	7 pos. from 30 to 80 mm	manual	170 lt	n/a
XF 140 HD	B&S P.B. 13,5 AVS	hydro	72 cm single blade	7 pos. from 30 to 80 mm	manual	170 lt	n/a
XG 140	B&S P.B. 13,5 AVS	gear	92 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	260 lt	yes
XG 140 HD	B&S P.B. 13,5 AVS	hydro	92 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	260 lt	yes
XG 170 HD	B&S P.B. 16,5 AVS	hydro	92 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	260 lt	yes
XD 140	B&S P.B. 13,5 AVS	gear	98 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	n/a	n/a
XD 170 HD	B&S P.B. 16,5 AVS	hydro	98 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	n/a	n/a
XDL 170	B&S P.B. 16,5 AVS	gear	108 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	n/a	n/a
XDL 190 HD	B&S P.B. 18,5 AVS	hydro	108 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	n/a	n/a
XT 170 HD	B&S P.B. 16,5 AVS	hydro	102 cm twin blades	7 pos. from 30 to 90 mm	electromagnetic clutch	320 lt	yes
XT 190 HD	B&S Intek 18,5	hydro	102 cm twin blades	7 pos. from 30 to 90 mm	electromagnetic clutch	320 lt	yes
XT 200 HD	B&S Intek V-twin 22	hydro	102 cm twin blades	7 pos. from 30 to 90 mm	electromagnetic clutch	320 lt	yes
XX 220 HD	B&S Intek V-twin 22	hydro	122 cm twin blades	7 pos. from 30 to 90 mm	electromagnetic clutch	320 lt	yes
XX 220 HDE	B&S Intek V-twin 22	hydro	122 cm twin blades	7 pos. from 30 to 90 mm	electromagnetic clutch	320 lt	yes
XTH 220	B&S Intek V-twin 22	hydro 2WD	102 cm twin blades	9 pos. from 25 to 100 mm	electromagnetic clutch	360 lt	yes
XHX 240	B&S Intek V-twin 24	hydro 2WD	122 cm twin blades	9 pos. from 25 to 100 mm	electromagnetic clutch	360 lt	yes
XHT 220 4WD	B&S Intek V-twin 22	hydro 4WD	102 cm twin blades	9 pos. from 25 to 100 mm	electromagnetic clutch	360 lt	yes
XHX 240 4WD E	B&S Intek V-twin 24	hydro 4WD	122 cm twin blades	9 pos. from 25 to 100 mm	electromagnetic clutch	360 lt	yes
XE 75 VD	Honda GCV 190	variator	63 cm single blade	7 pos. from 30 to 75 mm	manual	140 lt	n/a
XF 135 HD	Honda GXV 390	hydro	72 cm single blade	7 pos. from 30 to 80 mm	manual	170 lt	n/a
XG 135 HD	Honda GXV 390	hydro	92 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	260 lt	yes
XG 175 HD	Honda GCV 530 Twin cylinders	hydro	92 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	260 lt	yes
XDL 175 HD	Honda GCV 530 Twin cylinders	hydro	108 cm twin blades	7 pos. from 25 to 80 mm	electromagnetic clutch	n/a	n/a
XT 175 HD	Honda GCV 530 Twin cylinders	hydro	102 cm twin blades	7 pos. from 30 to 90 mm	electromagnetic clutch	320 lt	yes
XX 255 HD	Honda GXV 660 Twin cylinders	hydro	122 cm twin blades	7 pos. from 30 to 90 mm	electromagnetic clutch	320 lt	yes
XHX 255 4WD	Honda GXV 660 Twin cylinders	hydro 4WD	122 cm twin blades	9 pos. from 25 to 100 mm	electromagnetic clutch	360 lt	yes

















	<u> </u>						
HEADLI	GHTS WHEELS DIMENSIONS	ADJUSTABLE SEAT	DASHBOARD	BATTERY CHARGER	PACKAGING DIMENSIONS	GROSS WEIGHT	ACCESSORIES INCLUDED
n/a	11" x 4.00-4 15" x 6.00-6	yes	1 LED	yes	80/103/168	186 kg	none
twir		yes	6 LED	yes	99/109/194	221 kg	none
twin headlid		yes	/	yes	112/85/170	198 kg	none
twir headlic	15" x 5.00-6	yes	/	yes	112/85/170	200 kg	none
twir headlic	15" x 6.00-6	yes	6 LED	yes	109/112/186	267 kg	none
n/a	11" x 4.00-4 13" x 5.00-6	yes	/	yes	80/78/137	125 kg	none
n/a	11" v / 00-/	yes	1 LED	yes	80/103/168	185 kg	none
n/a	11" x 4.00-4 15" x 6.00-6	yes	1 LED	yes	80/103/168	193 kg	none
twin		yes	6 LED	yes	99/109/194	221 kg	trailer hitch
twin headlig		yes	6 LED	yes	99/109/194	228 kg	trailer hitch
twin headlid		yes	6 LED	yes	99/109/194	230 kg	trailer hitch
twin headlid		yes	/	yes	112/85/170	198 kg	mulching plug trailer hitch
twir headlic	15" x 6.00-6	yes	/	yes	112/85/170	204 kg	mulching plug trailer hitch
twin headlid		yes	/	yes	112/85/170	202 kg	mulching plug trailer hitch
twir headlic		yes	/	yes	112/85/170	204 kg	mulching plug trailer hitch
twir headlic	15" x 6.00-6	yes	6 LED	yes	109/112/186	267 kg	mulching plug trailer hitch
twir headlic	15" x 6.00-6	yes	6 LED with display	yes	109/112/186	269 kg	mulching plug trailer hitch
twin headlig		yes	6 LED with display	yes	109/112/186	276 kg	mulching plug trailer hitch
twin		yes	6 LED with display	yes	129/112/186	184 kg	mulching plug trailer hitch
twin headlid		yes	6 LED with display	yes	129/112/186	286 kg	mulching plug trailer hitch
twir headlig		yes	6 LED with display	yes	109/120/193	329 kg	mulching plug trailer hitch
twir headlig	16" x 6.50-6	VPS	6 LED with display	yes	129/120/193	337 kg	mulching plug trailer hitch
twin	16" x 6.50-6	VPS	6 LED with display	yes	109/120/193	352 kg	mulching plug trailer hitch
twir	16" x 6.50-6	VOC	6 LED with display	yes	129/120/193	357 kg	mulching plug trailer hitch
n/a	11" v 4 00-4	yes	/	yes	80/78/137	123 kg	none
n/a	11" v 4 00-4	yes	1 LED	yes	80/103/168	196 kg	none
twin	15" x 6.00-6	yes	6 LED	yes	99/109/194	231 kg	trailer hitch
twin	15" x 6.00-6	yes	6 LED	yes	99/109/194	232 kg	trailer hitch
twir	15" x 6.00-6	yes	/	yes	112/85/170	201 kg	mulching plug trailer hitch
twir headlig	15" x 6.00-6	yes	6 LED with display	yes	109/112/186	273 kg	mulching plug trailer hitch
twir headlig	15" x 6.00-6	yes	6 LED with display	yes	129/112/186	290 kg	mulching plug trailer hitch
twir headlid	16" x 6.50-6	yes	6 LED with display	yes	129/120/193	361 kg	mulching plug trailer hitch

MOWERS TO















MODEL	ENGINE	TRANSMISSION	CUTTING SYSTEM	CUTTING POSITIONS	BLADE ENGAGEMENT	COMBI SYSTEM	WASHING POSITION
X1	Castelgarden 12.5	gear	78 cm	9 pos.	manual	multiclip	1
XM 130	Castelgarden 12.5 / B&S 12.5	gear	85 cm	10 pos. from 25 to 85 mm	manual	mulching and rear discharge	yes
XM 140 HD	B&S 13.5	hydro	85 - 95 cm	10 pos. from 25 to 85 mm	manual	mulching and rear discharge	yes
XM 160 HD	B&S 15.5	hydro	85 - 105 cm	10 pos. from 25 to 85 mm	manual	mulching and rear discharge	yes

















HEADLIGHTS	WHEELS DIMENSIONS	ADJUSTABLE SEAT	STEERING BALL	BATTERY CHARGER	PACKAGING DIMENSION	GROSS WEIGHT	ACCESSORIES INCLUDED
1	13" x 5.00-6 13" x 5.00-6	yes	/	1	machine 86/92/202 deck included	machine and deck 150 kg	mulching kit
1	16" x 6.00-8 13" x 5.00-6	yes	yes	1	machine 85/92/171 deck 92/26/116	machine 192 kg deck 47 kg	mulching kit
/	16" x 6.00-8 13" x 5.00-6	yes	yes	1	machine 85/92/171 deck 92/26/116	machine 197 kg deck 47 kg	mulching kit
1	16" x 6.00-8 13" x 5.00-6	yes	yes	1	machine 85/92/171 deck 92/26/116	machine 200 kg deck 43 kg	mulching kit

LAWN MOWERS HONDA













		2			<b>-</b>
MODEL	ENGINE	RPM CONTROL/ DASHBOARD	DECK MATERIAL	CUTTING WIDTH	CUTTING POSITIONS
XP 50 H	GCV 135	Ergo handlebar accelerator on dashboard	ABS	46 cm high lift blade	2 handles - 5 positions 20/70mm
XP 50 HS	GCV 160 autochoke	Ergo handlebar accelerator on dashboard	ABS	46 cm high lift blade	2 handles - 5 positions 20/70mm
XS 50 MH	GCV 135	Ergo handlebar accelerator on dashboard	steel galvanized	46 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm
XS 50 MHS	GCV 135	Ergo handlebar accelerator on dashboard	steel galvanized	46 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm
XS 55 MHS	GCV 160 autochoke	Ergo handlebar accelerator on dashboard	steel galvanized	51 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm
XS 55 MHS 4	GCV 190 autochoke	Ergo handlebar accelerator on handle	steel galvanized	51 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm
XSW 50 MHS	GCV 160 autochoke	Ergo handlebar accelerator on dashboard	steel galvanized	46 cm kit mulching	centralized by 1 handle - 6 positions 30/90mm
XSW 55 MHS	GCV 190 autochoke	Ergo handlebar accelerator on dashboard	steel galvanized	51 cm kit mulching	centralized by 1 handle - 6 positions 30/90mm
XSIM 52 HS 4 INOX	GCV 160 autochoke	Pro handlebar fix rpm	stainless steel	48 cm mulching	centralized by 1 handle - 5 positions 31/75mm
XA 52 MHS	GCV 160 autochoke	Ergo handlebar accelerator on dashboard	aluminium	48 cm kit mulching	centralized by 1 handle - 6 positions 30/80mm
XAP 55 MHS	GCV 160 autochoke	PRO handlebar accelerator on dashboard	aluminium	51 cm kit mulching	centralized by 1 handle - 7 positions 30/80mm
XAPW 55 MHS 3	GCV 190 autochoke	PRO handlebar accelerator on dashboard	aluminium	51 cm kit mulching	centralized by 1 handle - 7 positions 30/100mm
XSI 55 MHS INOX	GCV 160 autochoke	Ergo handlebar accelerator on dashboard	stainless steel	51 cm kit mulching	centralized by 1 handle - 5 positions 30/75 mm
XSIW 55 MHS 4 INOX	GCV 190 autochoke	Ergo handlebar accelerator on handle	stainless steel	51 cm kit mulching	centralized by 1 handle - 6 positions 30/90mm













TING FIONS	DRIVING	BAG	WHEELS DIMENSIONS	SPEED VARIATOR	ALUMINIUM WHEELS	ELECTRIC START
ndles s 20/70mm	push	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	/	/
ndles s 20/70mm	self-propelled	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	/	/
by 1 handle s 30/75mm	push	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	/	/
by 1 handle s 30/75mm	self-propelled	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	/	1
by 1 handle s 30/75mm	self-propelled	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	/	1
by 1 handle s 30/75mm	self-propelled	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	4 speed	/	1
by 1 handle s 30/90mm	self-propelled	plastic canvas 70 lt	210/300 mm dryflex on ball bearings	/	/	1
by 1 handle s 30/90mm	self-propelled	plastic canvas 70 lt	210/300 mm dryflex on ball bearings	/	/	1
by 1 handle 31/75mm	self-propelled	1	210/210 mm dryflex on ball bearings	4 speed	/	/
y 1 handle 30/80mm	self-propelled	plastic canvas 70 lt	170/210 mm on ball bearings	/	/	1
y 1 handle 30/80mm	self-propelled	plastic canvas 70 lt	170/210 mm on ball bearings	/	yes	1
by 1 handle 30/100mm	self-propelled	plastic canvas 70 lt	210/300 mm dryflex on ball bearings	3 speed	/	1
y 1 handle 30/75 mm	self-propelled	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	/	1
y 1 handle 30/90mm	self-propelled	plastic canvas 70 lt	210/300 mm dryflex on ball bearings	4 speed	/	/













2 handles
- 5 positions 20/70mm
2 handles
- 5 positions 20/70mm
4 handles
- 5 positions 30/75mm
centralized by 1 handle
- 5 positions 30/75mm
centralized by 1 handle











XP 50 B	625 Series XRZ	Ergo handlebar accelerator on dashboard	ABS	46 cm high lift blade	2 handles - 5 positions 20/70mm		push	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	1	1	
XP 50 BS	625 Series XRZ	Ergo handlebar accelerator on dashboard	ABS	46 cm highlift blade	2 handles - 5 positions 20/70mm		self-propelled	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	1	1	1	
XS 50 B	500 Series XLQ	Ergo handlebar accelerator on dashboard	steel galvanized	46 cm	4 handles - 5 positions 30/75mm	_	push	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	1	1	1	
XS 50 MBS	625 Series XRZ	Ergo handlebar accelerator on dashboard	steel galvanized	46 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm	_	self-propelled	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	1	1	1	
XS 55 MB	650 Series XRZ Ready start	Ergo handlebar accelerator on dashboard	steel galvanized	51 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm		push	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	1	1	
XS 55 MBS	650 Series XRZ Ready start	Ergo handlebar accelerator on dashboard	steel galvanized	51 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm		self-propelled	plastic canvas 70 lt	170/210 mm dryflex on ball bearings	/	1	/	



accelerator on handle



LAWN MOWERS  ASTELGARDEN		3		<b>Z</b> cm	
XS 50 MG	MC 45	Ergo handlebar accelerator on handle	steel galvanized	46 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm
XS 50 MGS	MC 45	Ergo handlebar accelerator on handle	steel galvanized	46 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm
XS 55 MGS	MC 55	Ergo handlebar accelerator on handle	steel galvanized	51 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm
XSW 50 MGS	MC 55	Ergo handlebar accelerator on handle	steel galvanized	46 cm kit mulching	centralized by 1 handle - 6 positions 30/90mm
XSW 55 MGS	MC 65	Ergo handlebar accelerator on handle	steel galvanized	51 cm kit mulching	centralized by 1 handle - 6 positions 30/90mm
XSM 52 G	MC 45	Ergo handlebar accelerator on handle	steel galvanized	48 cm kulching	4 handles 5 positions 21/65mm
XSI 55 MGS INOX	MC 65	Ergo handlebar accelerator on handle	stainless steel	51 cm kit mulching	centralized by 1 handle - 5 positions 30/75mm
XSPW 55 MGS SILENT	MC 55	PRO handlebar accelerator on dashboard	steel galvanized	51 cm kit mulching	centralized by 1 handle - 6 positions 30/90mm

<b>%</b>	<b>O</b> lt		SPEED	(©) ALU	
push	plastic 60 lt	170/210 mm dryflex on ball bearings	1	1	1
self-propelled	plastic 60 lt	170/210 mm dryflex on ball bearings	1	1	1
self-propelled	plastic 60 lt	170/210 mm dryflex on ball bearings	1	1	I
self-propelled	plastic 60 lt	210/300 mm dryflex on ball bearings	1	1	I
self-propelled	plastic 60 lt	210/300 mm dryflex on ball bearings	/	1	1
push	1	190/190 mm on bushings	1	1	I
self-propelled	plastic 60 lt	170/210 mm dryflex on ball bearings	1	1	I
self-propelled	Silent bag 65 lt	210/300 mm dryflex on ball bearings	1	1	I

ELECTRIC START

yes

#### ELECTRIC LAWN MOWERS











					· ·
MODEL	ELECTRIC MOTOR	RPM CONTROL/ DASHBOARD	DECK MATERIAL	CUTTING WIDTH	CUTTING POSITIONS
XP 37 EL	1100 Watt - 230-240 V Spark cover	Ergo handle with dual hand switch	polypropylene	33 cm	screw in screw out - 3 position 25/55mm
XP 41 EL	1300 Watt - 230-240 V NCL cover	Ergo handle with dual hand switch	polypropylene	37 cm	centralized - 5 position 18/60mm
XPL 41 EL	1500 Watt - 230-240 V NCL cover	Foldable TELESCOPIC handle with dual hand switch	polypropylene	37 cm	centralized - 5 position 18/60mm
XPL 43 EL	1600 Watt - 230-240 V NCL cover	Foldable TELESCOPIC handle with dual hand switch	polypropylene	39 cm	centralized - 5 position 21/60mm
XS 45 EL	1600 Watt - 230-240 V Castel cover	Ergo handle with dual hand switch	steel galvanized	41 cm	4 handles 5 positions 30/75mm
XSW 50 ELS	1800 Watt - 230-240 V Castel cover	Ergo handle with dual hand switch	steel galvanized	46 cm	centralized by 1 handle - 6 positions 30/90mm

LAWN	<b>MOWE</b>	RS
<b>SPECIA</b>	L EDI	TION











SECUAL EDITION					
MODEL	ENGINE / ELECTRIC MOTOR	RPM CONTROL/ DASHBOARD	DECK MATERIAL	CUTTING WIDTH	CUTTING POSITIONS
XPE 37 EL	1000 Watt - 230-240 V Castel cover	Ergo handlebar with single hand switch	polypropylene	33 cm	screw in screw out - 3 position from 25 to 55 mm
XPE 41 EL	1300 Watt - 230-240 V Castel cover	Ergo handlebar with single hand switch	polypropylene	37 cm	screw in screw out - 3 position from 25 to 55 mm
XSE 45 EL	1600 Watt - 230-240 V Raser cover	Ergo handlebar with single hand switch	steel	41 cm	4 handles - 5 positions 30/75 mm
XSE 45 B	B&S 450 series	Ergo handlebar fix rpm	steel	46 cm	4 handles - 5 positions 30/75 mm
XSE 50 G	Castelgarden RV 40	Ergo handlebar accelerator on handle	steel	46 cm	4 handles - 5 positions 30/75 mm
XSE 50 B	B&S 500 series XQ	Ergo handlebar accelerator on handle	steel	46 cm	4 handles - 5 positions 30/75 mm
XSE 50 GS	Castelgarden RV 40	Ergo handlebar accelerator on handle	steel	46 cm	3 handles - 5 positions 30/75 mm
XSE 50 BS	B&S 500 series XQ	Ergo handlebar accelerator on handle	steel	46 cm	3 handles - 5 positions 30/75 mm
XSE 50 BSQ	B&S 500 series XQ	Ergo handlebar accelerator on handle	steel	46 cm 4 in 1 cutting system	2 handles - 6 positions 25/75 mm
XSEW 50 HS	Honda GCV 135	Ergo handlebar accelerator on handle	steel	46 cm	2 handles - 6 positions 25/90 mm
XSE 55 B	B&S 625 series XLS	Ergo handlebar accelerator on handle	steel	51 cm	2 handles - 6 positions 25/75 mm
XSEW 55 GS	Castelgarden OM 55	Ergo handlebar accelerator on handle	steel	51 cm	2 handles - 6 positions 25/90 mm
XSEW 55 BS	B&S 625 series XLS	Ergo handlebar accelerator on handle	steel	51 cm	2 handles - 6 positions 25/90 mm
XSEW 55 BSQ	B&S 625 series XLS Ready start	Ergo handlebar accelerator on handle	steel	51 cm 4 in 1 cutting system	2 handles - 6 positions 25/90 mm
XSEW 55 HSQ	Honda GCV 160	Ergo handlebar accelerator on handle	steel	51 cm 4 in 1 cutting system	2 handles - 6 positions 25/90 mm















~	$\sim$ 10	•	SPEED	ALO	•
DRIVING	BAG	WHEELS DIMENSIONS	SPEED VARIATOR	ALUMINIUM WHEELS	ELECTRIC START
push	plastic 27 lt	130/160 mm	1	1	1
push	plastic 35 lt	130/160 mm wide pattern	1	1	1
push	plastic canvas 40 lt	130/160 mm wide pattern	1	1	1
push	plastic canvas 45 lt	165/190 mm on bushings wide pattern	1	1	1
push	plastic canvas 70 lt	170/210 mm on ball bearings	1	1	1
self-propelled	plastic canvas 70 lt	210/300 mm on ball bearings	1	1	1













		0 0	SPEED	ALU	
DRIVING	BAG	WHEELS DIMENSIONS	SPEED VARIATOR	ALUMINIUM WHEELS	ELECTRIC START
push	plastic 27 lt	130/160 mm	1	1	1
push	plastic 35 lt	130/160 mm	1	1	1
push	plastic 60 lt	170/210 mm on bushing	1	1	1
push	plastic 60 lt	170/210 mm on bushing	1	1	1
push	plastic 60 lt	170/210 mm on bushing	1	1	1
push	plastic 60 lt	170/210 mm on bushing	1	1	1
self-propelled	plastic 60 lt	170/210 mm on bushing	1	1	1
self-propelled	plastic 60 lt	170/210 mm on bushing	1	1	1
self-propelled	plastic 60 lt	200/200 mm dryflex on ball bearings	1	1	1
self-propelled	plastic 60 lt	200/280 mm dryflex on ball bearings	1	1	1
push	plastic 60 lt	200/200 mm dryflex on ball bearings	1	1	1
self-propelled	plastic 60 lt	200/280 mm dryflex on ball bearings	1	1	1
self-propelled	plastic 60 lt	200/280 mm dryflex on ball bearings	1	1	1
self-propelled	plastic 60 lt	200/280 mm dryflex on ball bearings	1	1	1
self-propelled	plastic 60 lt	200/280 mm dryflex on ball bearings	1	1	1



MODEL

XSPW 52 MBS

XSPW 52 MBS BBC

XSPW 52 MBS INOX

XSPW 57 MBS BBC

XSPW 57 MBS 4 INOX AVS

XSPW 57 MBS

XSPW 52 MHS

XSPW 52 MHS BBC

XSPW 57 MHS BBC

XA 55 MBS BBC

XAW 55 MHS BBC

PRO 60 MHV BBC

PRO 60 MB

XSPW 57 MHS INOX BBC



**ENGINE** 

B&S 625 series XRZ

B&S 675 series XRZ

Ready Start

B&S 675 series XRZ

Ready Start

B&S 675 series XRZ

Ready Start

B&S 750 series DOV

Ready Start

B&S 750 series DOV

Ready Start

Honda GCV 160

autochoke

Honda GCV 160

autochoke

Honda GCV 190

autochoke

Honda GCV 190

autochoke

B&S 750 series DOV

Ready Start

Honda GCV 190

autochoke

B&S 750 series DOV

Ready Start

Honda GXV 160



RPM CONTROL/ DASHBOARD

New Ergo handlebar 25 mm

accelerator on handle

New Ergo handlebar 25 mm

fix rpm

New Ergo handlebar 25 mm

accelerator on handle

Ergo handlebar

accelerator on handle

Ergo handlebar

accelerator on handle

PRO handlebar 25 mm

accelerator on handle

PRO handlebar 25 mm

accelerator on handle



DECK MATERIAL

steel galvanized

steel galvanized

stainless steel

steel galvanized

steel galvanized

stainless steel

steel galvanized

steel galvanized

steel galvanized

stainless steel

aluminium

aluminium

aluminium

aluminium



CUTTING WIDTH

48 cm

4 in 1 cutting system

48 cm

4 in 1 cutting system

48 cm

4 in 1 cutting system

53 cm

4 in 1 cutting system

53 cm

4 in 1 cutting system

53 cm

4 in 1 cutting system

48 cm

4 in 1 cutting system

48 cm

4 in 1 cutting system

53 cm

4 in 1 cutting system

53 cm

4 in 1 cutting system

kit mulching

51 cm

kit mulching

50.5 cm

pro blade

50.5 cm

pro blade



CUTTING POSITIONS
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 6 positions 22/95 mm
centralized by 1 handle - 7 positions 30/80mm
centralized by 1 handle - 7 positions 30/100mm
centralized by 1 handle - 5 positions 26/76mm

centralized by 1 handle - 5 positions 26/76mm









**AVS BBC** 

			SPEED		
DRIVING	BAG	WHEELS DIMENSIONS	SPEED VARIATOR	AVS	BBC
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	1
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	yes
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	1
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	1
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	yes
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	4 speed	yes	1
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	1
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	yes
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	yes
self-propelled	plastic canvas 75 lt	210/300 mm dryflex on ball bearings	1	1	yes
self-propelled	plastic canvas 70 lt	170/210 mm on ball bearings	1	1	yes
self-propelled	plastic canvas 70 lt	210/300 mm dryflex on ball bearings	1	1	yes
self-propelled	canvas 80 lt	Pro 200/250 mm on ball bearings	1	yes	1
self-propelled	canvas 80 lt	Pro 200/250 mm on ball bearings	3 speed	yes	yes

#### **ELECTRIC TRIMMERS**







MODEL	ELECTRIC MOTOR	POWER	SHAFT
XR 350 J	300 Watt	0.3 kW	jointable
XR 500	500 Watt	0.5 kW	21 mm
XR 7 EL	700 Watt	0.7 kW	25 mm
XR 9 JEL	850 Watt	0.9 kW	25 mm jointable
XR 11 EL	1100 Watt	1.1 kW	26 mm
XB 10 JEL	1000 Watt	1.0 kW	25 mm jointable

#### PETROL **BRUSHCUTTERS**







DROSHOOTTERS	•		<b>&gt;</b>
MODEL	DISPLACEMENT	POWER	SHAFT
XR 26 J	25,4 cc	0.7 kW - 1.0 HP	26 mm curved jointable
XR 26	25,4 cc	0.7 kW - 1.0 HP	26 mm curved
XB 26 J	25,4 сс	0.7 kW - 1.0 HP	26 mm jointable
XB 26	25,4 cc	0.7 kW - 1.0 HP	26 mm
XB 26 JD	25,4 cc	0.7 kW - 1.0 HP	26 mm jointable
XB 26 D	25,4 cc	0.7 kW - 1.0 HP	26 mm
XB 34	32,6 cc	0.9 kW - 1.2 HP	26 mm
XB 34 D	32,6 cc	0.9 kW - 1.2 HP	26 mm
BJ 325	25,4 cc	0.7 kW - 1.0 HP	26 mm
BJ 325 D	25,4 cc	0.7 kW - 1.0 HP	26 mm
BJ 335	32,6 cc	0.9 kW - 1.2 HP	26 mm
BJ 335 D	32,6 cc	0.9 kW - 1.2 HP	26 mm
BJ 345	42,7 cc	1.1 kW - 1.5 HP	26 mm
3J 345 D	42,7 cc	1.1 kW - 1.5 HP	26 mm
BJ 345 F	42,7 cc	1.1 kW - 1.5 HP	28 mm flexible
XR 29 S	25.6 cc	0.9 kW - 1.2 HP	26 mm curved
XB 29 S	25.6 cc	0.9 kW - 1.2 HP	24 mm
KB 29 DS	25.6 cc	0.9 kW - 1.2 HP	24 mm
KB 35 S	32.6 cc	1.1 kW - 1.5 HP	26 mm
KB 35 DS	32.6 cc	1.1 kW - 1.5 HP	26 mm
KB 43 S	42.7 cc	1.4 kW - 1.9 HP	26 mm
(B 43 DS	42.7 cc	1.4 kW - 1.9 HP	28 mm
(B 51 S	47.1 cc	2.0 kW - 2.7 HP	26 mm
KB 51 DS	47.1 cc	2.0 kW - 2.7 HP	28 mm
KB 43 FS	42.7 cc	1.4 kW - 1.9 HP	28 mm flexible
(B 51 FS	47.1 cc	2.0 kW - 2.7 HP	28 mm flexible
(R 425 HJ	25.0 cc	0.8 kW - 1.1 HP	24 mm curved jointable
(B 425 H	25.0 cc	0.8 kW - 1.1 HP	26 mm
(B 425 HD	25.0 cc	0.8 kW - 1.1 HP	26 mm
(B 435 H	35.0 cc	1.2 Kw - 1.6 HP	26 mm
KB 435 HD	35.0 cc	1.2 kW - 1.6 HP	26 mm













BLADE	NYLON HEAD	HANDLE	HARNESS	WEIGHT
-	Tap&Go	loop	-	1.72 kg
-	Tap&Go	loop adjustable	-	2.66 kg
-	Tap&Go	loop	-	5.02 kg
-	Tap&Go	loop	-	5.53 kg
-	Tap&Go	loop	single	5.06 kg
4T - blade	Tap&Go	loop	single	6.00 kg











AY				∠/Kg \
BLADE	NYLON HEAD	HANDLE	HARNESS	WEIGHT
-	Tap&Go	loop	single	5.80 kg
-	Tap&Go	loop	single	5.80 kg
3T - blade	Tap&Go	loop	single	6.50 kg
3T - blade	Tap&Go	loop	single	6.50 kg
3T - blade	Tap&Go	bike	double	6.70 kg
3T - blade	Tap&Go	bike	double	6.70 kg
3T - blade	Tap&Go	loop	single	7.30 kg
3T - blade	Tap&Go	bike	double	7.50 kg
3T - blade	Tap&Go	loop	single	5.35 kg
3T - blade	Tap&Go	bike	single	6.25 kg
4T - blade	Tap&Go	loop	single	6.80 kg
4T - blade	Tap&Go	bike	double	7.75 kg
4T - blade	Tap&Go	loop	single	7.80 kg
4T - blade	Tap&Go	bike	double	8.50 kg
4T - blade	Tap&Go	loop	back pack	10.25 kg
-	Tap&Go	loop	single	5.30 kg
3T - blade	Tap&Go	loop	single	5.60 kg
3T - blade	Tap&Go	bike	double	6.00 kg
4T - blade	Tap&Go	loop	single	7.20 kg
4T - blade	Tap&Go	bike	double	7.90 kg
4T - blade	Tap&Go	loop	single	8.30 kg
4T - blade	Tap&Go	bike	double comfort	9.00 kg
4T - blade	Tap&Go	loop	single	8.40 kg
4T - blade	Tap&Go	bike	double comfort	9.10 kg
4T - blade	Tap&Go	loop	back pack	11.90 kg
4T - blade	Tap&Go	loop	back pack	12.00 kg
-	Tap&Go	loop	single	5.80 kg
3T - blade	Tap&Go	loop	single	7.20 kg
3T - blade	Tap&Go	bike	single	8.06 kg
4T - blade	Tap&Go	loop	single	9.75 kg
4T - blade	Tap&Go	bike	double	10.61 kg

#### **ELECTRIC** Kg kW **HEDGECUTTERS** BLADE LENGTH TEETH DISTANCE BLADE BRAKE MODEL POWER WEIGHT XH 470 E 450 Watt 0.45 kW 45 cm 16 mm 3.35 kg yes XH 540 E 500 Watt 0.50 kW 55 cm 18 mm yes 3.45 kg XH 600 E PRO 600 Watt 0.60 kW 60 cm 27 mm yes 3.80 kg

GRASS SHEAR		All	ппп			⟨ Kg \
MODEL	POWER	ACCUMULATOR TYPE	SHRUB LENGHT	SHEAR WIDTH	WORKING TIME	WEIGHT
XGS 60 LI 5 H	3.6 VOLT recharging time	1.1 Ah	160 mm	80 mm	50 min	0.54 kg

PETROL HEDGECUTTERS		kW/ <b>HP</b>	н	M	# <u>#</u>	Kg
MODEL	DISPLACEMENT	POWER	BLADE LENGTH	TEETH DISTANCE	BLADE BRAKE	WEIGHT
XHM 75	25.4 cc	0.8 kW - 1.1 HP	75 cm	28 mm	yes	5.40 kg
XHM 60	25,4 cc	0.8 kW - 1.1 HP	60 cm	28 mm	yes	5.70 kg
XHJ 550	24,5 cc	0.9 kW - 1.2 HP	61 cm	28 mm	yes	5.40 kg

ELECTRIC CHAINSAWS		kW				Kg
MODEL	ELECTRIC MOTOR	POWER	BAR LENGTH	CHAIN TYPE	TENSIONER	WEIGHT*
EX 170	1700 Watt	1.7 kW	14" - 35 cm	3/8".050" (91PJ - 50E)	manual	4.05 kg*
EX 170 Q	1700 Watt	1.7 kW	14" - 35 cm	3/8".050" (91PJ - 50E)	Quick - tensioner	4.05 kg*
EX 180	1800 Watt	1.8 kW	14" - 35 cm	3/8".050" (91VG - 50E)	manual	3.95 kg*
EX 180 Q	1800 Watt	1.8 kW	14" - 35 cm	3/8".050" (91VG - 50E)	Quick - tensioner	3.95 kg*
EX 200	2000 Watt	2.0 kW	16" - 40 cm	3/8".050" (91VG - 56E)	manual	3.95 kg*
EX 200 Q	2000 Watt	2.0 kW	16" - 40 cm	3/8".050" (91VG - 56E)	Quick - tensioner	3.95 kg*
XC 19 PE	1800 Watt	1.8 kW	14" - 35 cm	3/8".050" (91VG - 50E)	manual	3.90 kg*
XC 22 PE	2000 Watt	2.0 kW	16" - 40 cm	3/8".050" (91VG - 56E)	manual	3.90 kg*
XC 22 QE	2000 Watt	2.0 kW	16" - 40 cm	3/8".050" (91VG - 56E)	Quick - tensioner	3.90 kg*

GENUINE PARTS	GGP recommends the use of genuine spare parts

XC 48 P

XC 52 P

XC 68

48.7 cc

50.9 cc

62.0 cc

2.1 kW - 2.9 HP

2.3 kW - 3.1 HP

3.0 kW - 4.1 hp

PETROL CHAINSAWS		kW/ <b>HP</b>	•		OIL	Kg
MODEL	DISPLACEMENT	POWER	BAR LENGTH	CHAIN TYPE	OIL PUMP	WEIGHT*
XC 27 P	25.4 cc	1.0 kW - 1.3 HP	10" - 25 cm	3/8".050" (91VG - 40E)	automatic / adjustable	2.98 kg*
XC 27 PC	25.4 cc	1.0 kW - 1.3 HP	10" - 25 cm carving	1/4".050" (25AP - 60E)	automatic / adjustable	2.98 kg*
XC 28 P	25.4 cc	1.0 kW - 1.3 HP	12" - 30 cm	3/8".050" (91VG - 45E)	automatic / adjustable	2.98 kg*
XC 350	35.0 cc	1.4 kW - 1.9 HP	14" - 35 / 16" - 40 cm	3/8".050" (91PJ - 52 / 56E)	automatic	4.35 kg*
XC 350 Q	35.0 cc	1.4 kW - 1.9 HP	14" - 35 cm	3/8".050" (91PJ - 52E)	automatic	4.35 kg*
XC 400	40.0 cc	1.6 kW - 2.2 HP	16" - 40 / 18" - 45 cm	3/8".050" (91PJ - 56 / 60E)	automatic	4.40 kg*
XC 400 Q	40.0 cc	1.6 kW - 2.2 HP	16" - 40 cm	3/8".050" (91PJ - 56E)	automatic	4.40 kg*
XC 380	38,3 cc	1.7 kW - 2.3 HP	14" - 35 / 16" - 40 cm	3/8".050" (91VG - 50 / 56E)	automatic	4,70 kg*
XC 380 Q	38,3 cc	1.7 kW - 2.3 HP	14" - 35 / 16" - 40 cm	3/8".050" (91VG - 50 / 56E)	automatic	4,70 kg*
XC 38 P	38,3 cc	1.7 kW - 2.3 HP	14" - 35 / 16" - 40 cm	325".050" (95VP - 56 / 64E)	automatic	4,70 kg*
XC 40 P	40.1 cc	1.8 kW - 2.4 HP	13" - 33 cm	325".050" (95VP - 56E)	automatic	4.36 kg*
XC 42 P	40.1 cc	1.8 kW - 2.4 HP	16" - 40 cm	325".050" (95VP - 66E)	automatic	4.36 kg*
XC 44 P	40.1 cc	1.8 kW - 2.4 HP	18" - 45 cm	325".050" (95VP - 72E)	automatic / Adjustable	4.36 kg*
XC 47 P	48.7 cc	2.1 kW - 2.9 HP	16"- 40 / 18"- 45 cm	325".050" (95VP - 66 / 72 E)	automatic	5.30 kg*

18" - 45 cm

18" - 45 / 20" - 50 cm

18" - 45 / 20" - 50 cm

325".050" (95VP - 72E)

325".058" (21BP-72/78 E)

3/8".058" (73LP- 66 / 72 E)

\*Weight without bar and chain.

5.30 kg\*

5.52 kg\*

5.67 kg\*

automatic / adjustable

automatic

automatic / adjustable

BLOWERS		kW/HP	m³/min	m/sec	*	Kg
MODEL	DISPLACEMENT	POWER	AVERAGE AIR SPEED	MAX SPEED AIR	VACCUM KIT	WEIGHT
XBL 260 H	25,4 cc	0.7 kW - 1.0 HP	7,8 cu.m/min.	28 m/sec	included 50 It capacity	5.00 kg
XBL 250 H	22.5 cc	0.9 kW - 1.2 HP	10 cu.m/min.	67 m/sec	-	5.90 kg
XBL 620 B	62.0 cc	2.9 kW - 3.9 HP	15,7 cu.m/min.	87 m/sec	-	8.50 kg

114. CASTELGARDEN

#### CHIPPER SHREDDER













Kg	
WEIGHT	

MODEL	ELECTRIC MOTOR	POWER	CUTTING SYSTEM	CAPACITY FOR BRANCHES	COLLECTOR	WEIGHT
BIO POWER	2100 Watt	2.10 kW	rotating disc with 2 blades	40 mm	included	18.20 kg
BIO QUIET	2100 Watt	2.10 kW	cutter with 8 teeth	45 mm	included	23.90 kg

#### **CULTIVATORS**









MODEL	ENGINE	DISPLACEMENT	GEAR BOX	TRANSMISSION
TELLUS 360 - G	Castelgarden V35	150 cc	1 speed	endless screw in oil bath and belt
TELLUS 500 - G	Castelgarden M50	150 cc	1 speed	endless screw in oil bath and belt
TELLUS 500 R - G	Castelgarden OM55	160 cc	1 speed + reverse	endless screw in oil bath and belt
TELLUS 40 - G	Castelgarden SV40	150 cc	1 speed	endless screw in oil bath and belt
TELLUS 40 R - G	Castelgarden OM55	160 cc	1 speed + reverse	endless screw in oil bath and belt
TELLUS 50 - G	Castelgarden OM55	160 cc	1 speed	endless screw in oil bath and belt
TELLUS 50 R - B	B&S 625 series	190 cc	1 speed + reverse	endless screw in oil bath and belt
TELLUS 50 R - H	Honda GCV 135	135 cc	1 speed + reverse	endless screw in oil bath and belt
TELLUS 75 R - G	Castelgarden TM60	182 cc	1 speed + reverse	chain in running oil coupled to belt drive
TELLUS 75 R - B	B&S 800 series	205 cc	1 speed + reverse	chain in running oil coupled to belt drive
TELLUS 75 R - H	Honda GC 160	160 cc	1 speed + reverse	chain in running oil coupled to belt drive
TELLUS 75 R - HX	Honda GX 160	163 cc	1 speed + reverse	chain in running oil coupled to belt drive
TELLUS 82 R - HX	Honda GX 160	163 cc	2 speed + reverse	gears transmission and oil bath chain + belts

CH	LTIVATORS	
CO	LITVATORS	,









		_		
MODEL	ENGINE	DISPLACEMENT	GEAR BOX	TRANSMISSION
TELLUS 95 B	B&S 675 series	190 cc	1 speed + reverse	worm in oil bath and gears coupled to belts drive
TELLUS 95 H	Honda GCV 160	160 cc	1 speed + reverse	worm in oil bath and gears coupled to belts drive
TELLUS 103 B	B&S Intek OHV 6,5	205 cc	2 speed + reverse	gears and chain in oil bath and belt

#### PETROL SCYTHE







MODEL	ENGINE	DISPLACEMENT	GEAR BOX
TELLUS 87 B	B&S 625 series	190 сс	1 speed



**SCARIFIERS** 













MODEL	ELECTRIC MOTOR	POWER	WORKING WIDTH	NUMBER OF KNIVES	WORKING DEPTH	COLLECTOR	WEIGHT
XRE 30	1100 Watt	1.10 kW	30 cm	-	3 positions	35 It included	17 kg
VCE 22	1EOO Watt	1 EO kW	22 cm	10	E positions	40 It included	20 kg









ADJUSTABLE HANDLEBAR	WORKING WIDTH	TRANSPORT WHEEL	GROSS WEIGHT
in height	36 cm	front	25 kg
in height + sideways	50 cm	front	41 kg
in height + sideways	50 cm	front	41 kg
in height	40 cm	rear	29 kg
in height	40 cm	rear	29 kg
in height + sideways	50 cm	rear	41 kg
in height + sideways	50 cm	rear	41 kg
in height + sideways	50 cm	геаг	41 kg
in height	75 cm	front	50 kg
in height	75 cm	front	50 kg
in height	75 cm	front	50 kg
in height	75 cm	front	50 kg
in height + sideways	82 cm	front	85 kg









ADJUSTABLE HANDLEBAR	WORKING WIDTH	PNEUMATIC DRIVE WHEELSWHEEL	GROSS WEIGHT
in height + reversible	-	13 x 5.00 - 6	50 kg
in height + reversible	-	13 x 5.00 - 6	50 kg
in height	60 cm	13 x 5.00 - 6	73 kg









TRANSMISSION	WHEELS	CUTTING WIDTH	GROSS WEIGHT
endless screw in oil bath and belts	4.00-6 semi-pneumatic	87 cm with easy connection system	54 kg



www.castelgarden.com

GGP GROUP
GLOBAL GARDEN PRODUCTS

Via del Lavoro, 6 31033 Castelfranco Veneto (Treviso) - ITALY Tel. +39.0423.450111 Fax +39.0423.450670 www.ggp-group.com infoline@ggp-group.com



Your Castelgarden stockist

Castelgarden has a policy of continuous improvement and reserves the right to change models and specification without prior notice.